

IMPACT PROTECTION

CUT PROTECTION

Benchmark**BMG784****ULTRA LIGHTWEIGHT, EXTREME CUT RESISTANT GLOVES WITH NITRILE FOAM**

Using the latest innovation, BMG784 is a very light weight glove (18 gauge) providing outstanding cut protection and high dexterity in the most risky applications. Thin, Breathable and long lasting coating, ideal for all precise applications.

FEATURES

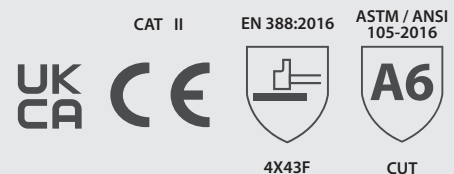
- › Extreme cut resistance: Level F (EN 388:2016)
- › 18 gauge seamless liner offers flexibility, comfort and high fingertip sensitivity
- › HPPE on the inside provides comfort and protection
- › Specific metal fibre and Nylon on the outside, fully encapsulated enable extreme cut protection against burrs and sharp edges.
- › Nitrile foam coating gives exceptional grip in oily conditions while allowing warm air and moisture from inside to escape, keeping your hands dry and comfortable
- › Reinforced thumb crotch enhances durability
- › Designed for easy movement and continuous wear
- › Breathable back of hand to reduce perspiration
- › Seamless knit prevents irritation
- › Elasticated wrist provides a secure fit

**SUITABLE FOR****Typical Industries**

- Automotive
- Construction
- Logistics
- Maintenance
- Manufacturing
- Transport

Suitable Applications

- Assembly
- Handling Sharp and Greasy Parts
- Machining
- Bodywork
- Precision Mechanics

CERTIFICATION

See overleaf for explanation

Globus
GROUP

IMPACT PROTECTION

CUT PROTECTION

Benchmark**BMG784****PRODUCT INFORMATION**

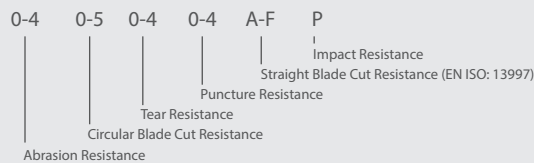
MATERIALS	LINER:	18 gauge HPPE, nylon, metal fiber
	COATING:	Foam nitrile
COLOUR	Green/Black	
LENGTH (mm)	250 (Size Dependent)	
CUFF STYLE	Elasticated knit wrist	

RECOMMENDATIONS FOR USE

- **USE:** General handling glove with cut protection. Not suitable for thermal, electrical, chemical protection. Do not use near moving machines if there is a risk of entanglement
- **STORAGE:** Store in dry conditions in the original packaging and away from direct sunlight
- **CLEANING:** To clean, wipe with a damp cloth. Note: The performance characteristics of worn and laundered gloves may differ from the results shown. Inspect the gloves to ensure no damage is present.
- **LIFETIME:** Service life depends on the glove application and therefore cannot be specified. It is the responsibility of user to ensure the glove is suitable for its intended use.

ORDERING DETAILS

SIZE	CODE	PACKAGING
7/S	BMG00784ED	10 pairs per bag
8/M	BMG00784EF	120 pairs per case
9/L	BMG00784EH	
10/XL	BMG00784EJ	
11/XXL	BMG00784EL	

CERTIFICATION LEGENDSMECHANICAL HAZARDS EN 388:2016
PERFORMANCE LEVELS*

*If tests are not performed or are not applicable, 'X' will be placed instead of a number/letter

CLASSIFICATION FOR CUT RESISTANCE

Measured breakthrough time	Permeation performance index (grams)
A1	≥ 200
A2	≥ 500
A3	≥ 1000
A4	≥ 1500
A5	≥ 2200
A6	≥ 3000
A7	≥ 4000
A8	≥ 5000
A9	> 6000

EUROPEwww.globusgroup.comE: sales@globus.co.uk

T: +44 (0)161 877 4747

F: +44 (0)161 877 4746

MIDDLE EAST AND AFRICAwww.globusgroup.com/gccE: gcc@globusgroup.com

T: +971 4 882 9962

F: +971 4 882 9963

GLOBUS AMERICASwww.globusgroup.comE: americas@globusgroup.com

Globus Group, T2 Trafford Point, Twining Road, Trafford Park, Manchester, M17 1SH, UNITED KINGDOM
 Globus EMEA FZE, Jafza One, Tower A, Office 2201, Jebel Ali, PO Box 61195, Dubai, UNITED ARAB EMIRATES
 Globus Americas LLC, 45 Rockefeller Plaza, Suite 2000, New York City, New York, 10111, USA

©2022 Globus (Shetland) Ltd | BMK-DATA-BMG784_0722_1

EU compliance certificate delivered by the notified body INTERTEK ITALIA SPA, Via Guido Miglioli, 2/A - 20063 Cernusco sul Naviglio (MI) - Italia (Notified Body No. 2575)
 UKCA compliance certificate delivered by the notified body ITS Testing Services UK Ltd, Centre Court, Meridian Business Park, Leicester, LE19 1WD, United Kingdom (Approved Body No. 0362)

The descriptions, characteristics, applications and photos are given for information purposes and do not constitute a contractual commitment. The manufacturer reserves the right to make any modifications it deems necessary.